





Effective edge protection

3

Protection for exteriors




Cipolon® comprises a highly compressible material and is used to compensate for uneven surfaces and as a seal to stop concrete flowing out when precast slabs are concreted into place. This prevents dirt, dust and damp from penetrating.

Cipolon® is primarily used with structural components highly subject to static stress. The product is used as edge protection for structural components.

Cipolon® is quickly and easily installed: simply fit the product flush along the front support edge and you're done! There is no need for construction adhesive or other additional ancillary materials.

Cipolon® is relatively soft, but extremely resilient and resistant to deformation. The product is weather-resistant and long-lasting

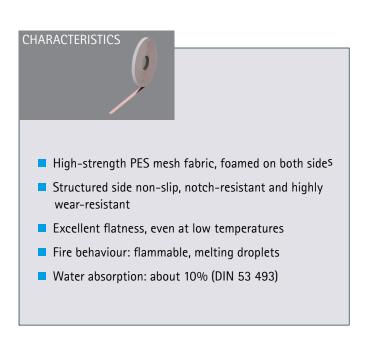

TECHNICAL DATA	
Thickness	about 7 mm
Weight	about 500 g/Rolle
Roll size	10 m x 30 mm



Am Knübel 2 - 4 31020 Salzhemmendorf | Germany

Tel. + 49 51 53 - 94 00-0 Fax + 49 51 53 - 94 00-49

info@calenberg-ingenieure.de www.calenberg-ingenieure.de

A LISEGA Group Company



The contents of this publication are the result of many years of research and experience gained in the application of this technology.

All information and instructions are based on the best knowledge available to us; they do not represent a warranty of suitability for particular tasks nor do they exempt the user from conducting their own checks, including verifying third-party property rights. No liability whatsoever will be accepted for damage arising from advice given in this publication, regardless of its nature and its legal basis.

We reserve the right to make technical modifications in the course of product development.