


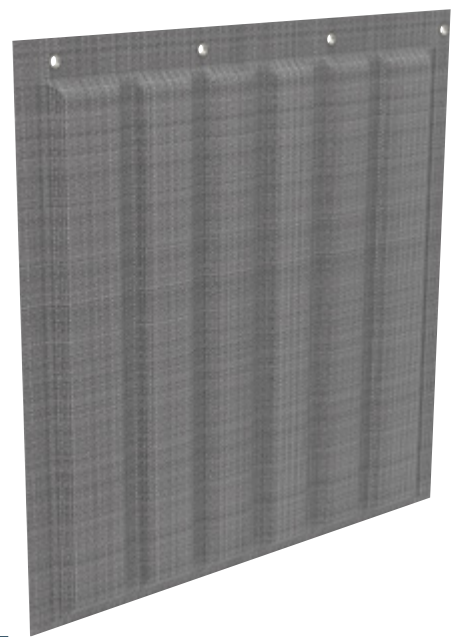

# CISILENT Type E

# Noise control

Efficient

Flexible sound insulation for indoors and outdoors

# RELIABLY PROTECTED AGAINST NOISE

FIND PEACE AND WELL-BEING WITH CALENBERG

The patented flexible noise barrier Cisilent Type E achieves a sound reduction index of  $R_w = 21$  dB and ensures improved airborne sound insulation. Its special design concept, low transport weight and easy installation mean it can also be used in mobile structures.


HOW  
KNOW





## Peace and quiet as basic need

Increasing construction projects and heavy traffic in inner city areas cause significant and permanent noise pollution for residents. Calenberg has developed a lightweight flexible sound insulation system to protect the environment from intrusive air-borne noise and meet requirements for an increased need for rest. The systems are quick and flexible in their use (for corner cut-outs and pipe penetrations, for example) to provide different noise control measures and can also be optimally integrated into the surrounding area, even where there is little space.

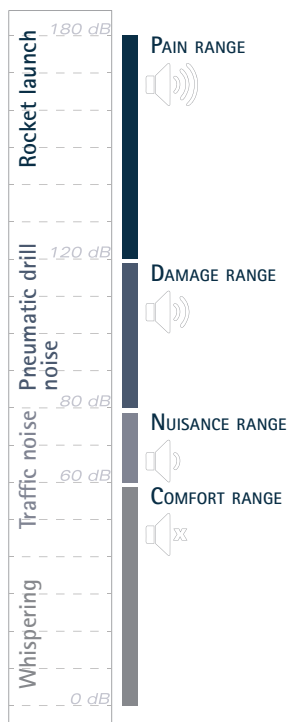

Early noise control planning with Cisilent Type E will avoid delays or hindrance in your project.

The adjacent decibel scale shows the noise level for common ambient noises.

## Structure

The textile structure made of high-strength polyester fabric features three layers interconnected in such a way that they form pockets to hold the filling medium. These pockets are offset from one another at the sides on the front and rear, thus offering unique flexibility in the panels. Their surfaces are resistant to water, ozone, UV radiation, dirt and micro-organisms. Filling the chambers with non-flammable insulation rock wool potentially increases the sound reduction index up to 53 dB. There are no standard sizes as all elements are manufactured to client specifications. Only the length parallel to the chambers is limited to 4 m for production reasons.



## Noise control — light and flexible


### Effective protection for outdoor installations, construction sites and noisy events

The combination between special materials, flexible lightweight structure and matching design achieves high efficiency even at low frequencies. Such efficiency is generally only achieved with solid, heavy systems. Enclosures and shielding for machines in industry can be implemented without loss of effectiveness, for example. Noisy areas in office buildings can be divided by soundproofing curtain systems without intruding on the ordinary course of business. Cisilent Type E helps satisfy the human need for rest, whether it insulates noise from humming fans or city festivals.

Stationary noise protection measures can be implemented in both buildings and outdoors. Cisilent Type E's enormous absorption capacity delivers solution approaches which are impossible for rigid systems. Thanks to its light weight, Cisilent Type E is particularly suitable for mobile sound insulation. It can insulate the noise from vehicles and crane systems effectively, for example.

Cisilen® Type E can also be fitted to standard scaffolds as a temporary application during building activity. The panel size is adapted to the scaffolding system with an overlapping layout providing complete protection.

Cisilent Type E can be purchased or rented.

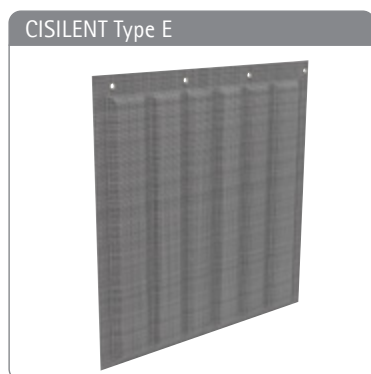

### ADVANTAGES

#### Properties, application

Highly sound-absorbing; low weight of around 5.5 kg/m<sup>2</sup>; flexible use in terms of place, subsurface, installation length and similar; easy to install/dismantle; can be moved; easy to transport; long service life; heat-, -ozone and weather-resistant; sturdy panel structure; resource-efficient thanks to reusability; quickly available.

Areas of use: Civil engineering and building construction sites of all types; changing work sites in rail track and road construction; temporary events, machine enclosures, soundproof booths, room partitions, demolition works and noise-sensitive locations such as schools, hospitals and retirement homes.

Cisilent Type E is manufactured by hand in many dimensions when it is for sale. When rented, it is tailored to the scaffolding section size. A fastening system suitable for construction sites simplifies installation and saves time. There is no need for heavy tools or devices for its installation. Our mobile solution offers a decisive advantage over solid construction concepts in the higher frequency range in that it achieves the same or better noise control despite its low mass per unit area.





## Mobile noise barrier

Covering scaffolding surfaces with Cisilent Type E is used to insulate and absorb air-borne noise. The system can also be used as screening and a dust protection wall. The supporting structure is either provided by the client or consists of modular scaffolds.

Two fitting variants of Cisilent Type E are suitable for installation on scaffolding systems. The first version features eyelets 16 mm in diameter. These are located at about every 30 cm along the surrounding fastening edge. Each eyelet can bear a load of around 1 kN. Cisilent Type E panels are fastened to the scaffolding poles through the eyelets with cable binders or similar.

The second version is fastened to scaffolding poles using buckle belts. These buckle belts are fitted to the cover layer. Each buckle belt can bear a load of around 1kN when secured firmly by hand.

Unrolled in a scaffold section



Fastened and aligned



## Noise control indoors

Effective protection against noisy machines and other sources of intrusive noise

The Cisilent Type E's low mass per unit area provides bespoke noise control in both production and administration areas. Customised solutions and measures are developed to protect those affected from noise and maintain productivity. Our comprehensive sound insulation includes reduction of sound transmission from one room to another in the building interior and prevents sound transmission in the event of loud noise emission inside the building. Temporary sources of noise can be sealed off acoustically. Clamping strips, bayonet connectors or castors in rails can be used to fasten the system in such cases.

Cisilent Type E is used, for example, in a curtain system, in soundproof booths or mounted on a frame to provide acoustic separation in workplaces.




## Noise control outdoors

Minimising noise exposure

Cisilent Type E's absorption effect is often sufficient to provide effective noise control. In such cases, Cisilent panels can often be attached quickly and easily to existing structures thanks to flexible manufacturing options, such as angled cuts or pipe penetrations. If this is not possible, simple supporting structures are often adequate to ensure effective noise control for the long term.

The options for using Cisilent Type E range from machine enclosures and installation on construction scaffolding through to permanent sound insulation surfaces.

## Extract from our client reference projects



### CISILENT TYPE E

- Temporary noise barrier, paper and cardboard factory, Varel, Germany
- Cooling system enclosure, Ireland
- Noise control for bunker demolition, Hamburg, Germany
- Canal bank crane enclosure, Berlin, Germany
- Event stage enclosure, Hannover, Germany
- Drill rig enclosure, Ascheberg, Germany
- Extruder enclosure, Kuala Lumpur, Malaysia
- Pipe milling cutter enclosure, Salzgitter, Germany
- Powder coating machine curtain system, Gaggenau, Germany
- Hangar aircraft maintenance curtain system, Luxembourg
- Mobile noise barrier, Hamburg, Germany



Temporary noise barrier, Varel, Germany



Cooling system enclosure, Ireland

### Mobile system for rent

Would you like to rent Cisilent Type E? Tell us what your requirements are and how long you need to rent. We'll gladly give you a quote for your event, construction site or other temporary use.



Noise barrier, bunker demolition, Hamburg, Germany

©AVG Nord GmbH



Am Knübel 2 - 4  
31020 Salzhemmendorf | Germany

Tel. + 49 51 53 - 94 00-0  
Fax + 49 51 53 - 94 00-49

[cisilent@calenberg-ingenieure.de](mailto:cisilent@calenberg-ingenieure.de)  
[www.calenberg-ingenieure.com](http://www.calenberg-ingenieure.com)

#### LOSHEIM WORKS

Saarbrücker Str. 221a  
66679 Losheim am See | Germany

Tel. + 49 6872- 92238-0  
[cisilent@calenberg-ingenieure.de](mailto:cisilent@calenberg-ingenieure.de)  
[www.calenberg-ingenieure.com](http://www.calenberg-ingenieure.com)

A LISEGA Group Company



The contents of this publication are the result of many years of research and experience gained in the application of this technology. All information is given in good faith; it does not represent a guarantee with respect to characteristics and does not exempt the user from testing the suitability of products and from ascertaining that the industrial property rights of third parties are not violated. No liability whatsoever will be accepted for damage arising from advice given in this publication, regardless of its nature or legal basis. We reserve the right to make technical modifications in the course of product development.