


## OIL-EX Absorption Mat

Elastomeric bearings for environmental protection

### Product data

PROPERTIES	
Materials	Polyurethane bound waste rubber granulate with vulcanized nitrile-butadiene and styrene-butadiene rubber
Thickness	20 mm
Width	1480 mm
Length	≤ 50 m
Weight	16 kg / m <sup>2</sup>
Absorption capacity	approx. 10 l / m <sup>2</sup>
Density	0,65 g / cm <sup>2</sup> (Absorption layer) 1,12 g / cm <sup>3</sup> (Barrier layer)
Flammability	In unstressed condition classified in building material class B2 according to DIN 4102 part 2
Disposal	Via an authorised waste disposal company for thermal recycling. Waste code: AVV 150202 / 31435 / 54209

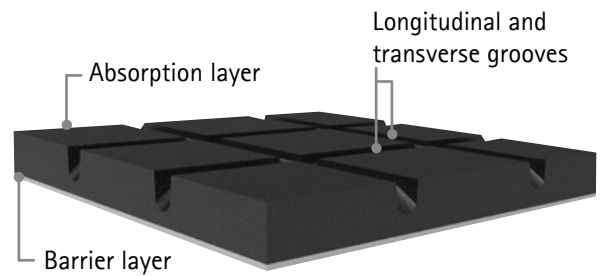

The contents of this publication are the result of many years of research and experience gained in the application of this technology. All information is given in good faith; it does not represent a guarantee with respect to characteristics and does not exempt the user from testing the suitability of products and from ascertaining that the industrial property rights of third parties are not violated. No liability whatsoever will be accepted for damage – regardless of its nature and its legal basis – arising from advice given in this publication. We reserve the right to make technical modifications in the course of product development.

© Copyright – Calenberg Ingenieure GmbH – 2020

Rev. 1

03 March 2020

Calenberg Ingenieure GmbH | Am Knübel 2-4 | 31020 Salzhemmendorf | Germany | info@calenberg-ingenieure.de | www.calenberg-ingenieure.de