

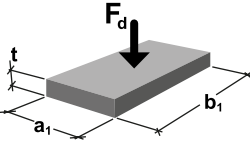

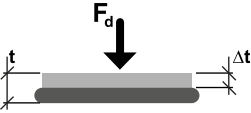


COMPACT BEARING CR 2000

Structural bearing for static structural members

Design values

The bearings are dimensioned according to the general building authority approval up to a compressive stress $\sigma_{R,d} = 28 \text{ N/mm}^2$. The design concept is based on the shape factor. Holes, cut-outs and the required edge distances must be taken into account according to DIN EN 1992.

TYPE OF LOAD ACTING

| Design value of bearing resistance | All. shear deformation | Deflection | Allowable rotation | Transverse tensile forces* |
|---|---|---|--|---|
|  |  |  |  |  |

FORMEL

| | | | | |
|---|--|------------|---|--|
| $\sigma_{R,d} = 6 \cdot S^{1,44} \leq 28 \text{ [N/mm}^2\text{]}$ Note: Formula in the data sheet in the sense of a simpler application slightly modified Shape factor S see page 2 | all. $u = 0.6 \cdot (t-2) \text{ [mm]}$ Horizontal force $H_d = c_{s(t)} \cdot u \cdot A_E / 20000 \text{ [kN]}$ A minimum compressive stress of 2 N/mm^2 is required to prevent the bearing from slipping. $c_{s(t)}$ values and boundary conditions, see page 8 | See page 6 | all. $\alpha = \frac{400 \cdot t}{a_1} \leq 40 \text{ [‰]}$ (Rectangular bearing) Additional rotation acc. to technical approval: • 10 ‰ from obliquity • $\frac{625}{a_1} \text{ ‰}$ from unevenness see also booklet 600, DAfStb | $Z_{a,d} = 1.5 \cdot F_d \cdot t / b_1 \text{ [kN]}$ (perpendicular to bearing short side) $Z_{b,d} = 1.5 \cdot F_d \cdot t / a_1 \text{ [kN]}$ (perpendicular to bearing long side) *see also booklet 339, DAfStb |
|---|--|------------|---|--|

LEGENDE FORMELZEICHEN

| | | | |
|--------------------|--|----------------|-------------------------------------|
| F_d | Vertical force | $\sigma_{R,d}$ | Design value of the load capacity |
| H_d | Horizontal force | $\sigma_{E,d}$ | Design compressive stress from load |
| $Z_{a,d}, Z_{b,d}$ | Transverse tensile force | α | Bearing rotation |
| A_E | Bearing area | $c_{s(t)}$ | Shear stiffness |
| S | Shape factor, Ratio of pressed bearing surface A_E to unloaded lateral surface | u | Shear deformation of the bearing |
| a_1 | Short side of bearing | γ | Push angle |
| b_1 | Long side of bearing | t | Thickness of bearing |
| a | Component width | Δt | Bearing deflection |
| b | Component length | | |

COMPACT BEARING CR 2000

Structural bearing for static structural members

Design of the shape factor

For the design of unreinforced elastomeric bearings, the shape factor S is defined as the ratio of the compressed to the freely deformable surface. The shape factor S is used to calculate the permissible compressive stress as a function of the bearing dimensions.

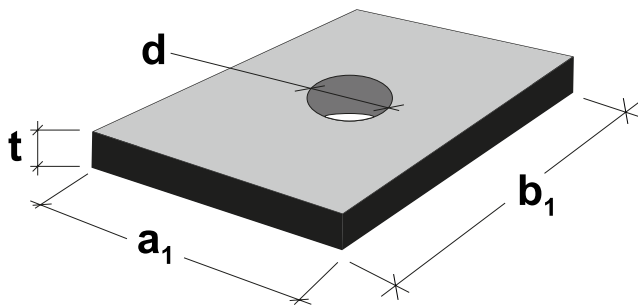
SHAPE FACTOR FOR RECTANGULAR BEARING

Without drilled holes

$$S = \frac{b_1 \cdot a_1}{2 \cdot t \cdot (b_1 + a_1)}$$

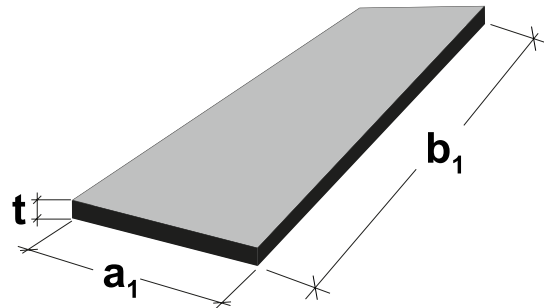
With drilled holes, $n \leq 4$

$$S = \frac{a \cdot b - \frac{\pi}{4} n \cdot d^2}{2 \cdot t \cdot (a+b) + t \cdot \pi \cdot n \cdot d}$$



SHAPE FACTOR FOR BEARING STRIP

$$S = \frac{a_1}{2 \cdot t} \quad b_1 \gg a_1$$



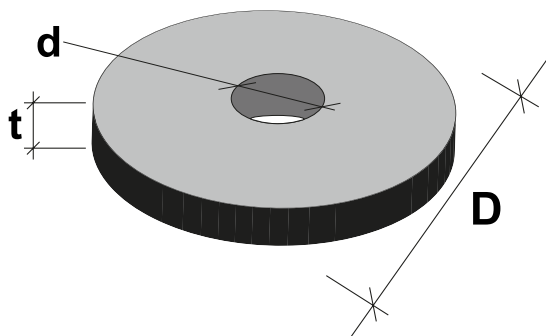
SHAPE FACTOR FOR CIRCULAR BEARING

Without drilled holes

$$S = \frac{d}{4 \cdot t}$$

With drilled holes

$$S = \frac{D^2 - d^2}{4 \cdot t \cdot (D + d)}$$



COMPACT BEARING CR 2000

Structural bearing for static structural members

Thicknesses: 11 and 16 mm

The following tables show the design value of the load capacity and the allowable angle of distortion as a function of the bearing dimensions. Intermediate values may be interpolated.

| BEARING | | | DESIGN VALUE OF THE LOAD CAPACITY, $\sigma_{R,d}$ [N/mm ²] | | | | | | | | | | | | | | | | | | | |
|------------|---------------|-------|--|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| [mm] | α [‰] | [mm] | BEARING LENGTH [mm] | | | | | | | | | | | | | | | | | | | |
| Thick-ness | all. rotation | Width | 70 | 80 | 90 | 100 | 110 | 120 | 130 | 140 | 150 | 175 | 200 | 225 | 250 | 275 | 300 | 350 | 400 | 450 | 500 | |
| | | | 11 | 40.0 | 50 | - | - | - | 10.9 | 11.4 | 11.9 | 12.2 | 12.6 | 12.9 | 13.6 | 14.2 | 14.7 | 15.1 | 15.4 | 15.7 | 16.1 | 16.5 |
| 40.0 | 60 | - | | - | - | 12.9 | 13.6 | 14.2 | 14.7 | 15.2 | 15.7 | 16.6 | 17.4 | 18.1 | 18.7 | 19.2 | 19.6 | 20.3 | 20.8 | 21.2 | 21.6 | |
| 40.0 | 70 | 11.7 | | 11.9 | 12.5 | 14.8 | 15.6 | 16.4 | 17.1 | 17.7 | 18.3 | 19.6 | 20.6 | 21.5 | 22.3 | 22.9 | 23.5 | 24.4 | 25.2 | 25.8 | 26.3 | |
| 40.0 | 80 | 12.8 | | 12.7 | 13.5 | 16.5 | 17.5 | 18.5 | 19.3 | 20.1 | 20.8 | 22.4 | 23.7 | 24.8 | 25.8 | 26.7 | 27.4 | | | | | |
| 40.0 | 90 | 13.9 | | 13.5 | 14.3 | 18.1 | 19.3 | 20.4 | 21.4 | 22.3 | 23.2 | 25.1 | 26.7 | | | | | | | | | |
| 40.0 | 100 | 14.8 | | 14.1 | 15.1 | 19.6 | 20.9 | 22.2 | 23.3 | 24.4 | 25.4 | 27.7 | | | | | | | | | | |
| 40.0 | 110 | 15.6 | | 14.7 | 15.8 | 20.9 | 22.4 | 23.9 | 25.2 | 26.4 | 27.6 | | | | | | | | | | | |
| 36.7 | 120 | 16.4 | | 15.3 | 16.4 | 22.2 | 23.9 | 25.4 | 26.9 | | | | | | | | | | | | | |
| 33.8 | 130 | 17.1 | | 15.8 | 16.9 | 23.3 | 25.2 | 26.9 | | | | | | | | | | | | | | |
| 31.4 | 140 | 17.7 | | 16.2 | 17.4 | 24.4 | 26.4 | | | | | | | | | | | | | | | |
| 29.3 | 150 | 18.3 | | 16.6 | 17.9 | 25.4 | 27.6 | | | | | | | | | | | | | | | |
| 27.5 | 160 | 18.8 | | 17.0 | 18.3 | 26.4 | | | | | | | | | | | | | | | | |
| 25.1 | 175 | 19.6 | | 17.5 | 18.9 | 27.7 | | | | | | | | | | | | | | | | |
| 22.0 | 200 | 20.6 | | 18.2 | 19.7 | | | | | | | | | | | | | | | | | |
| 17.6 | 250 | 22.3 | | 19.3 | 21.0 | | | | | | | | | | | | | | | | | |
| 14.7 | 300 | 23.5 | | 20.1 | 21.0 | | | | | | | | | | | | | | | | | |
| 13.3 | 330 | 24.1 | 20.5 | 21.0 | | | | | | | | | | | | | | | | | | |

28.0

Use in in-situ concrete: Embedding in polystyrene

Use in fire resistance class F90 / F120: If necessary, embedding in Ciflamon fire protection panel

| BEARING | | | DESIGN VALUE OF THE LOAD CAPACITY, $\sigma_{R,d}$ [N/mm ²] | | | | | | | | | | | | | | | | | | |
|------------|---------------|-------|--|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| [mm] | α [‰] | [mm] | BEARING LENGTH [mm] | | | | | | | | | | | | | | | | | | |
| Thick-ness | all. rotation | Width | 80 | 90 | 100 | 110 | 120 | 130 | 140 | 150 | 175 | 200 | 225 | 250 | 275 | 300 | 350 | 400 | 450 | 500 | |
| | | | 16 | 40.0 | 80 | 8.3 | 9.0 | 9.6 | 10.2 | 10.8 | 11.3 | 11.7 | 12.1 | 13.1 | 13.8 | 14.5 | 15.1 | 15.5 | 16.0 | 16.7 | 17.3 |
| 40.0 | 90 | 9.0 | | 9.8 | 10.6 | 11.2 | 11.9 | 12.5 | 13.0 | 13.5 | 14.6 | 15.6 | 16.4 | 17.1 | 17.7 | 18.2 | 19.1 | 19.9 | 20.5 | 21.0 | |
| 40.0 | 100 | 9.6 | | 10.6 | 11.4 | 12.2 | 12.9 | 13.6 | 14.2 | 14.8 | 16.1 | 17.3 | 18.2 | 19.1 | 19.8 | 20.5 | 21.6 | 22.4 | 23.2 | 23.8 | |
| 40.0 | 110 | 10.2 | | 11.2 | 12.2 | 13.1 | 13.9 | 14.7 | 15.4 | 16.1 | 17.6 | 18.9 | 20.0 | 21.0 | 21.9 | 22.6 | 24.0 | 25.0 | 25.9 | 26.7 | |
| 40.0 | 120 | 10.8 | | 11.9 | 12.9 | 13.9 | 14.8 | 15.7 | 16.5 | 17.3 | 19.0 | 20.5 | 21.7 | 22.9 | 23.9 | 24.8 | 26.3 | 27.6 | | | |
| 40.0 | 130 | 11.3 | | 12.5 | 13.6 | 14.7 | 15.7 | 16.6 | 17.5 | 18.4 | 20.3 | 22.0 | 23.4 | 24.7 | 25.8 | 26.9 | | | | | |
| 40.0 | 140 | 11.7 | | 13.0 | 14.2 | 15.4 | 16.5 | 17.5 | 18.5 | 19.4 | 21.6 | 23.4 | 25.0 | 26.5 | 27.8 | | | | | | |
| 40.0 | 150 | 12.1 | | 13.5 | 14.8 | 16.1 | 17.3 | 18.4 | 19.4 | 20.5 | 22.8 | 24.8 | 26.6 | | | | | | | | |
| 36.6 | 175 | 13.1 | | 14.6 | 16.1 | 17.6 | 19.0 | 20.3 | 21.6 | 22.8 | 25.5 | | | | | | | | | | |
| 32.0 | 200 | 13.8 | | 15.6 | 17.3 | 18.9 | 20.5 | 22.0 | 23.4 | 24.8 | | | | | | | | | | | |
| 25.6 | 250 | 15.1 | | 17.1 | 19.1 | 21.0 | 22.9 | 24.7 | 26.5 | | | | | | | | | | | | |
| 21.3 | 300 | 16.0 | | 18.2 | 20.5 | 22.6 | 24.8 | 26.9 | | | | | | | | | | | | | |
| 18.3 | 350 | 16.7 | | 19.1 | 21.6 | 24.0 | 26.3 | | | | | | | | | | | | | | |
| 16.0 | 400 | 17.3 | | 19.9 | 22.4 | 25.0 | 27.6 | | | | | | | | | | | | | | |
| 14.2 | 450 | 17.7 | | 20.5 | 23.2 | 25.9 | | | | | | | | | | | | | | | |
| 13.3 | 480 | 18.0 | | 20.8 | 23.6 | 26.4 | | | | | | | | | | | | | | | |

28.0

Use in in-situ concrete: Embedding in polystyrene

Use in fire resistance class F90 / F120: If necessary, embedding in Ciflamon fire protection panel

COMPACT BEARING CR 2000

Structural bearing for static structural members

Thickness: 21 mm

| BEARING | | | DESIGN VALUE OF THE LOAD CAPACITY, $\sigma_{R,d}$ [N/mm ²] | | | | | | | | | | | | | | |
|-----------|---------------|-------|--|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| [mm] | α [‰] | [mm] | BEARING LENGTH [mm] | | | | | | | | | | | | | | |
| Thickness | all. rotation | Width | 110 | 120 | 130 | 140 | 150 | 175 | 200 | 225 | 250 | 275 | 300 | 350 | 400 | 450 | 500 |
| | | | 21 | 40.0 | 110 | 8.8 | 9.4 | 9.9 | 10.4 | 10.9 | 11.9 | 12.8 | 13.5 | 14.2 | 14.8 | 15.3 | 16.2 |
| 40.0 | 120 | 9.4 | | 10.0 | 10.6 | 11.2 | 11.7 | 12.8 | 13.8 | 14.7 | 15.5 | 16.2 | 16.8 | 17.8 | 18.6 | 19.4 | 20.0 |
| 40.0 | 130 | 9.9 | | 10.6 | 11.3 | 11.9 | 12.4 | 13.7 | 14.8 | 15.8 | 16.7 | 17.5 | 18.2 | 19.4 | 20.4 | 21.2 | 21.9 |
| 40.0 | 140 | 10.4 | | 11.2 | 11.9 | 12.5 | 13.1 | 14.6 | 15.8 | 16.9 | 17.9 | 18.8 | 19.6 | 20.9 | 22.1 | 23.0 | 23.8 |
| 40.0 | 150 | 10.9 | | 11.7 | 12.4 | 13.1 | 13.8 | 15.4 | 16.8 | 18.0 | 19.1 | 20.0 | 20.9 | 22.4 | 23.7 | 24.8 | 25.7 |
| 40.0 | 160 | 11.3 | | 12.2 | 13.0 | 13.7 | 14.5 | 16.2 | 17.7 | 19.0 | 20.2 | 21.3 | 22.2 | 23.9 | 25.4 | 26.6 | 27.6 |
| 40.0 | 175 | 11.9 | | 12.8 | 13.7 | 14.6 | 15.4 | 17.3 | 18.9 | 20.5 | 21.8 | 23.0 | 24.2 | 26.1 | 27.8 | | |
| 40.0 | 200 | 12.8 | | 13.8 | 14.8 | 15.8 | 16.8 | 18.9 | 20.9 | 22.7 | 24.4 | 25.8 | 27.2 | | | | |
| 33.6 | 250 | 14.2 | | 15.5 | 16.7 | 17.9 | 19.1 | 21.8 | 24.4 | 26.7 | | | | | | | |
| 28.0 | 300 | 15.3 | | 16.8 | 18.2 | 19.6 | 20.9 | 24.2 | 27.2 | | | | | | | | |
| 24.0 | 350 | 16.2 | | 17.8 | 19.4 | 20.9 | 22.4 | 26.1 | | | | | | | | | |
| 21.0 | 400 | 16.9 | | 18.6 | 20.4 | 22.1 | 23.7 | 27.8 | | | | | | | | | |
| 18.7 | 450 | 17.5 | | 19.4 | 21.2 | 23.0 | 24.8 | | | | | | | | | | |
| 16.8 | 500 | 18.0 | | 20.0 | 21.9 | 23.8 | 25.7 | | | | | | | | | | |
| 14.0 | 600 | 18.8 | 20.9 | 23.0 | 25.1 | 27.2 | | | | | | | | | | | |
| 13.3 | 630 | 19.0 | 21.2 | 23.3 | 25.4 | 27.6 | | | | | | | | | | | |

28.0

Use in in-situ concrete: Embedding in polystyrene

Use in fire resistance class F90 / F120: If necessary, embedding in Ciflamon fire protection panel

COMPACT BEARING CR 2000

Structural bearing for static structural members

| STRIP BEARINGS | | | | | | |
|----------------------------|-------------------------|----------------------|---------------------|----------------------|---------------------|----------------------|
| BEARING WIDTH a [mm] | COMPACT BEARING CR 2000 | | | | | |
| | BEARING THICKNESSES | | | | | |
| | t = 11 mm | | t = 16 mm | | t = 21 mm | |
| | $F_{R,d}$ [kN/m] | max. α [‰] | $F_{R,d}$ [kN/m] | max. α [‰] | $F_{R,d}$ [kN/m] | max. α [‰] |
| 50 | 978 | 40.0 | - | - | - | - |
| 60 | 1527 | 40.0 | - | - | - | - |
| 70 | 1960 | 40.0 | - | - | - | - |
| 80 | 2240 | 40.0 | 1796 | 40.0 | - | - |
| 90 | 2520 | 40.0 | 2394 | 40.0 | - | - |
| 100 | 2800 | 40.0 | 2800 | 40.0 | - | - |
| 110 | 3080 | 40.0 | 3080 | 40.0 | 2640 | 40.0 |
| 120 | 3360 | 36.7 | 3360 | 40.0 | 3265 | 40.0 |
| 130 | 3640 | 33.8 | 3640 | 40.0 | 3640 | 40.0 |
| 140 | 3920 | 31.4 | 3920 | 40.0 | 3920 | 40.0 |
| 150 | 4200 | 29.3 | 4200 | 40.0 | 4200 | 40.0 |
| 160 | 4480 | 27.5 | 4480 | 40.0 | 4480 | 40.0 |
| 170 | 4760 | 25.9 | 4760 | 37.6 | 4760 | 40.0 |
| 180 | 5040 | 24.4 | 5040 | 35.6 | 5040 | 40.0 |
| 190 | 5320 | 23.2 | 5320 | 33.7 | 5320 | 40.0 |
| 200 | 5600 | 22.0 | 5600 | 32.0 | 5600 | 40.0 |
| 210 | 5880 | 21.0 | 5880 | 30.5 | 5880 | 40.0 |
| 220 | 6160 | 20.0 | 6160 | 29.1 | 6160 | 38.2 |
| 230 | 6440 | 19.1 | 6440 | 27.8 | 6440 | 36.5 |
| 240 | 6720 | 18.3 | 6720 | 26.7 | 6720 | 35.0 |
| 250 | 7000 | 17.6 | 7000 | 25.6 | 7000 | 33.6 |

Use in in-situ concrete: Embedding in polystyrene
 Use in fire resistance class F90 / F120: If necessary, embedding in Ciflamon fire protection panel

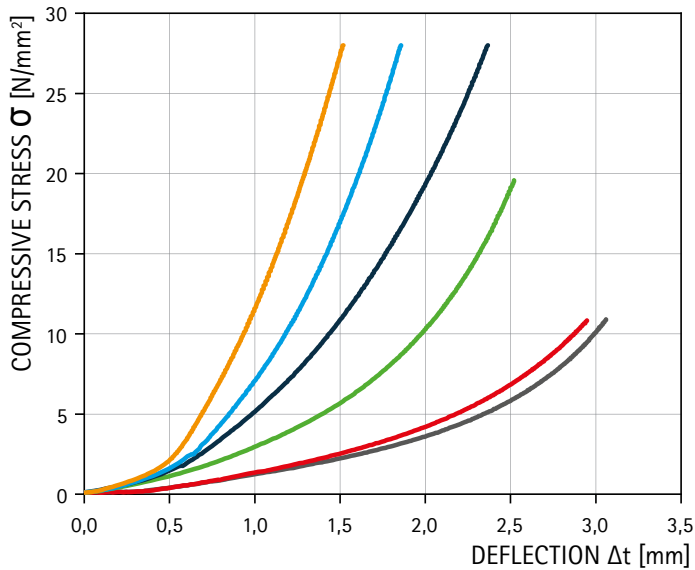
COMPACT BEARING CR 2000

Structural bearing for static structural members







Load deflection curves

The following diagrams show the compression behaviour for different formats when used between concrete surfaces (precast elements).

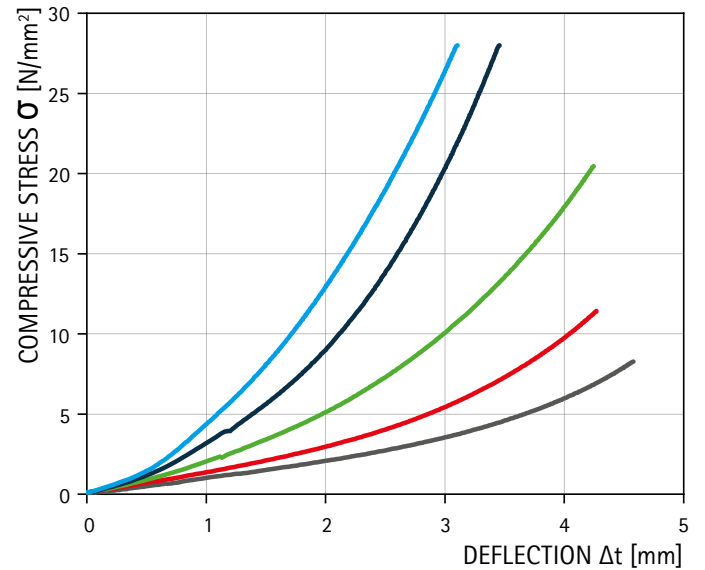
Thickness 11 mm








LEGEND

| | | | |
|---|-----------------|---|-----------------|
|  | 50 mm x 100 mm |  | 150 mm x 150 mm |
|  | 70 mm x 70 mm |  | 200 mm x 200 mm |
|  | 100 mm x 100 mm |  | 250 mm x 200 mm |

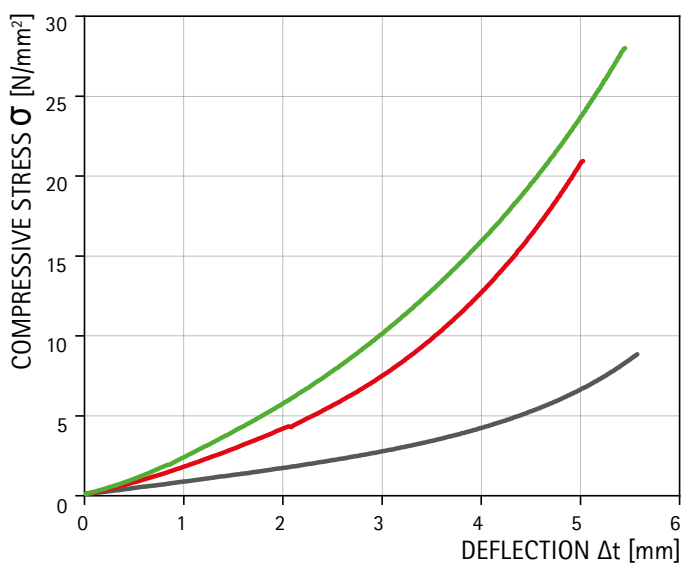
Thickness 16 mm






LEGEND

| | | | |
|---|-----------------|---|-----------------|
|  | 80 mm x 80 mm |  | 200 mm x 200 mm |
|  | 100 mm x 100 mm |  | 250 mm x 250 mm |
|  | 150 mm x 150 mm | | |

Thickness 21 mm



LEGEND

| | |
|---|-----------------|
|  | 110 mm x 110 mm |
|  | 200 mm x 200 mm |
|  | 250 mm x 250 mm |

COMPACT BEARING CR 2000

Structural bearing for static structural members

Design example

Given: $F_{E,d} = 1250$ kN, bearing rotation $\alpha = 12$ ‰, horizontal deformation $u = 3$ mm

Selected dimensions:

$$a = 150 \text{ mm}, b = 320 \text{ mm}, t = 16 \text{ mm}$$

Shape factor:

$$S = \frac{150 \text{ mm} \times 320 \text{ mm}}{2 \times 16 \text{ mm} \times (150 \text{ mm} + 320 \text{ mm})} = 3.2$$

Load capacity:

$$\sigma_{R,d} = 6 \text{ N/mm}^2 \times 3.2^{1.44} = 32 \text{ N/mm}^2 > 28.0 \text{ N/mm}^2$$

$$\rightarrow \sigma_{R,d} = 28 \text{ N/mm}^2$$

$$F_{R,d} = \sigma_{R,d} \times A = 28.0 \text{ N/mm}^2 \times 150 \text{ mm} \times 320 \text{ mm} = 1344 \text{ kN}$$

$$F_{R,d} \geq F_{E,d} \rightarrow \text{Load capacity of the bearing is sufficient}$$

Bearing distortion from component deflection: $\alpha = 12$ ‰

Additional twisting from obliquity:

$$10 \text{ ‰}$$

Additional twisting from unevenness:

$$625 \text{ (mm} \cdot \text{‰)} / a \text{ (mm)} = 625 / 150 = 4.1 \text{ ‰}$$

Total rotation to be measured:

$$\alpha = 12 \text{ ‰} + 10 \text{ ‰} + 4.1 \text{ ‰} = 32.9 \text{ ‰}$$

$$\text{max. } \alpha = 400 \text{ ‰} \times t/a = 400 \text{ ‰} \times 16 \text{ mm} / 150 \text{ mm} = 42.7 \text{ ‰} > 40 \text{ ‰}$$

$$\rightarrow \text{max. } \alpha = 40 \text{ ‰}$$

$$\text{max. } \alpha \geq \alpha \rightarrow \text{Angle of twist for rotation is sufficient}$$

Horizontal deformation of structural members: $u = 3$ mm

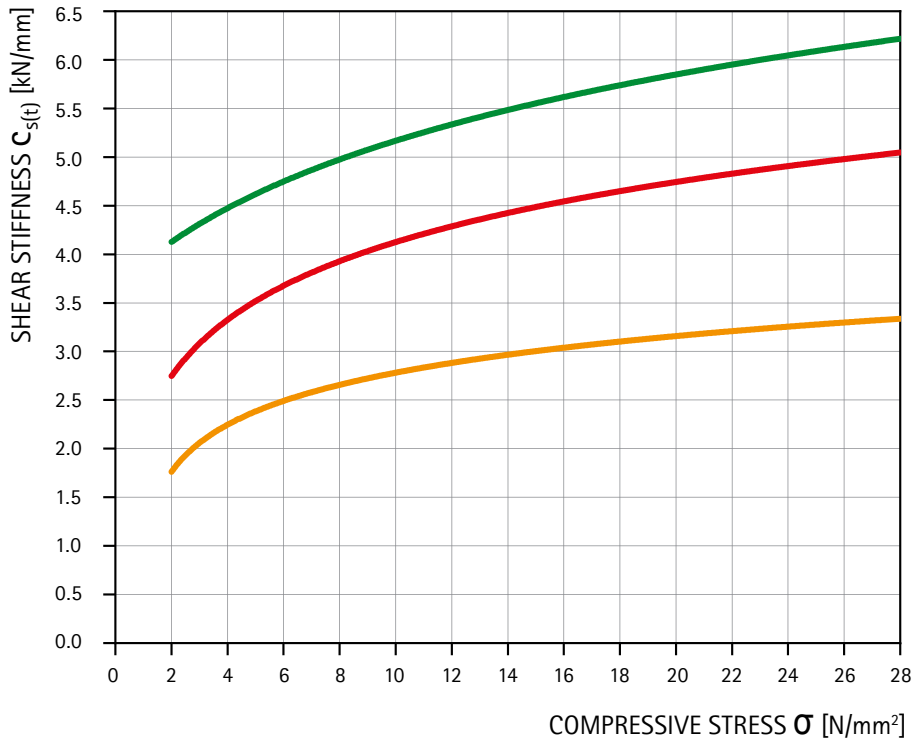
$$\text{max. } u = 0.6 \times (t-3) = 7.8 \text{ mm}$$

$$\text{max. } u \geq u \rightarrow \text{Shear deformability of the bearing is sufficient}$$

COMPACT BEARING CR 2000

Structural bearing for static structural members

Shear stiffness



LEGEND

- 11 mm
- 16 mm
- 21 mm

DIAGRAM

For the horizontal shear deformation from unilaterally acting horizontal forces, no verification is required, since unilaterally slight sliding does not lead to any damaging changes in the structural layout. If the thrust deflection is to be a „pure“ shear deformation, a vertical bearing compressive stress $\sigma_{E,d}$ of at least 2 N/mm² is required.

The contents of this publication are the result of many years of research and experience gained in the application of this technology. All information is given in good faith; it does not represent a guarantee with respect to characteristics and does not exempt the user from testing the suitability of products and from ascertaining that the industrial property rights of third parties are not violated. No liability whatsoever will be accepted for damage – regardless of its nature and its legal basis – arising from advice given in this publication. We reserve the right to make technical modifications in the course of product development.

© Copyright – Calenberg Ingenieure GmbH – 2024

Version 0

11 January 2024

Calenberg Ingenieure GmbH | Am Knübel 2-4 | 31020 Salzhemmendorf | Germany | info@calenberg-ingenieure.de | www.calenberg-ingenieure.com